


ALP SGh 540-555W

Monocrystalline Solar Module

144 Cells / Mono PERC / 1500V DC / 21.5% Maximum Efficiency

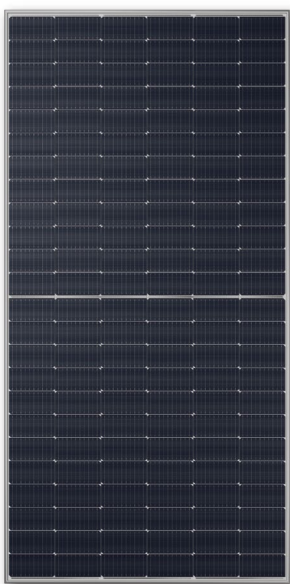

Bloomberg
New Energy Finance



KEY FEATURES



Higher module conversion efficiency

Maximize limited space with high efficiency mono PERC cells
Half-cell design, lower Rs loss, lower hot spot temperature



Highly reliable due to stringent quality control

100% EL double inspection
In-house testing goes well beyond certification requirements



Excellent low light performance

Excellent low light performance on cloudy days
mornings and evenings



Certified to withstand the most challenging environment

2400 Pa wind load • 5400 Pa snow load • 25 mm hail stones at 82 km/h



High system voltage compatible

Maximum 1500V DC system voltage saves total system cost



IP68 junction box

High waterproof level for long term weather endurance

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, IEC 62941
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety


WARRANTY

12
years

Product
Warranty

25
years

Performance
Warranty

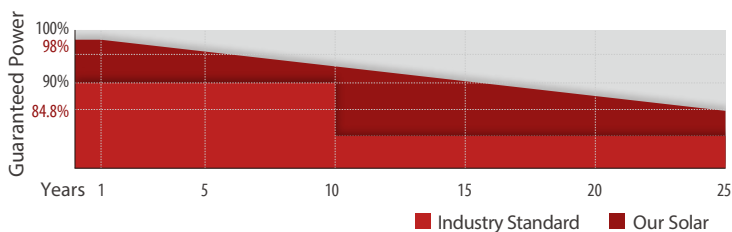

Wuxi ALP Technology Co., Ltd

Add: No.2610, Building 8, 3rd Financial Street, Binhu District, Wuxi, China



Email: evanzhang@ks-alp.com

Web: www.wx-alp.com

TEL/Wechat: +86 13621950365

WhatsApp: +86 18851503628

IV CURVES

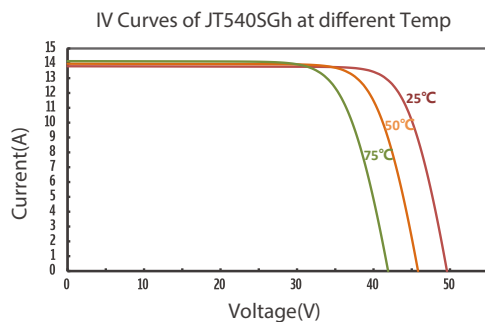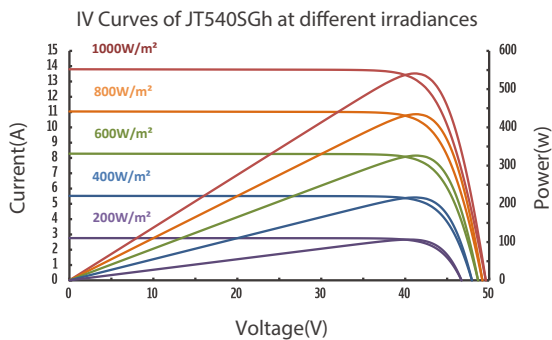

ELECTRICAL DATA *STC

TYPE (Tolerance: 0 - +5W)	JT540SGh	JT545SGh	JT550SGh	JT555SGh
Maximum Power Pmax (W)	540	545	550	555
Maximum Power Voltage Vmp (V)	41.7	41.9	42.1	42.3
Maximum Power Current Imp (A)	12.95	13.01	13.07	13.13
Open Circuit Voltage Voc (V)	49.6	49.8	50.0	50.2
Short Circuit Current Isc (A)	13.80	13.86	13.92	13.98
Module Efficiency (%)	20.9%	21.1%	21.3%	21.5%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

Measuring tolerance: ±3%

ELECTRICAL DATA *NMOT

Maximum Power Pmax (W)	405.21	409.25	413.31	417.37
Maximum Power Voltage Vmp (V)	39.0	39.2	39.4	39.6
Maximum Power Current Imp (A)	10.39	10.44	10.49	10.54
Open Circuit Voltage Voc (V)	46.6	46.8	47.0	47.2
Short Circuit Current Isc (A)	11.12	11.16	11.20	11.24

NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE RATINGS

Temperature Coefficient of Isc (αIsc)	+0.048%/°C
Temperature Coefficient of Voc (βVoc)	-0.27%/°C
Temperature Coefficient of Pmax (γPmp)	-0.35%/°C
Normal Module Operating Temperature (NMOT)	41°C±3°C

OPERATING PARAMETERS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A
Maximum Test Load, Push/Pull	5400Pa/2400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ
Voc and Isc Tolerance	±2%/±3%


MECHANICAL DATA

Solar Cell Type	Mono 91×182 mm(3.6×7.2 inches)
Number of Cells	144 [2 x (12 x 6)]
Module Dimensions	2278×1134×35 mm(89.7×44.6×1.4 inches)
Weight	26.8 kg(59.1 lb)
Front Cover	3.2 mm (0.13 inches), high transmission, AR coated tempered glass
Back Cover	White composite film
Frame	Silver, anodized aluminium alloy
J-Box	≥IP68
Cable	4.0 mm ² solar cable, 400mm(+)/200mm(-)
Number of diodes	3

PACKAGING CONFIGURATION

Module per pallet	31 pieces
Module per 40'HQ container	20 pallets, 620 pieces

DIMENSION

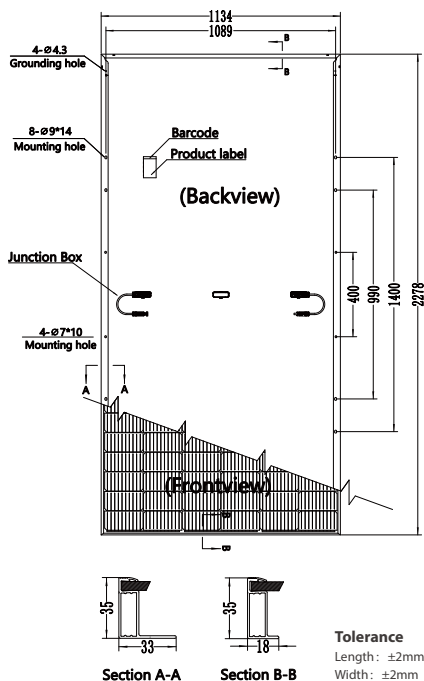

Remarks